

INDOOR UNITS

ALL-OUTSIDE AIR DUCTED



■ 4 capacities


(9.00–28.00 kW)

- Maximum compactness: only 28 cm (9.00–14.00 kW) and only 37.9 cm (22.40–28.00 kW)
- Max static pressure of fans: 200 Pa
- Automatic function "all-outside air" to save energy when the outdoor temperature drops below the set temperature.
- Can be connected to 8–60HP outdoor units except Micro Compact KXZ (4–6HP) and KXZ Smart


FDU 650~2400 FKXZE1

AIR CONDITIONING AND OUTDOOR AIR INTAKE

The diagram below illustrates the integration of the FDU-F unit inside a KXZ system.

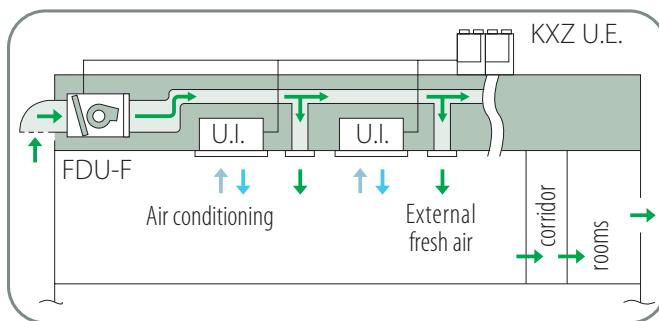

Note: Check the possible connections and limits of use on the technical documentation.

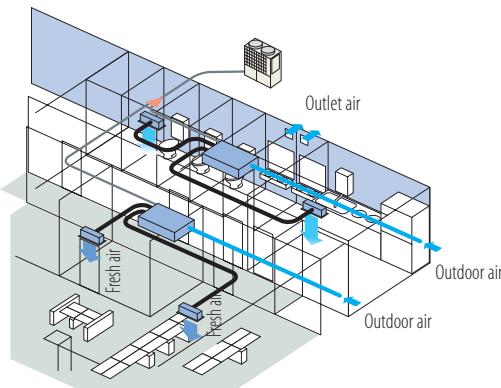

The compact design, the fan static pressure of 200 Pa and the lowest noise level on the market make the unit suitable for installation in environments designed to ensure comfort and relaxation.

Model	FDU 650 FKXZE1	FDU 1100 FKXZE1	FDU 1800 FKXZE1	FDU 2400 FKXZE1
Rated capacity (Cooling)	kW	9.00	14.00	22.40
Rated capacity (Heating)	kW	6.50	10.50	16.00
Power supply				
Power input (Cooling)	kW	0.24 - 0.25	0.35 - 0.36	1.16 - 1.20
Power input (Heating)	kW	0.24 - 0.25	0.35 - 0.36	1.16 - 1.20
Rated current (Cooling)	A	1.80 - 1.70	2.30 - 2.20	6.80 - 6.50
Rated current (Heating)	A	1.80 - 1.70	2.30 - 2.20	6.80 - 6.50
Sound power level	dB(A)	55	62	68
Sound pressure level	dB(A)	Hi 31	Hi 37	Hi 42
External dimensions (HxLxD)	mm	280 x 950 x 635	280 x 1370 x 740	379 x 1600 x 893
Net weight	kg	34	54	89
Refrigerant circuit/Heat exchanger		Finned and internally grooved pipes		
Refrigerant control		Electronic expansion valve		
Air treatment/fan type & quantity		Centrifugal fan x 2	Centrifugal fan x 3	
Motor	W	130	100 + 200	130 + 350
Starting method		Direct, in line		
Air flow (standard)	m³/h	Hi 660	Hi 1080	Hi 1800
Static pressure	Pa	Max: 200	Max: 200	Max: 200
Air filter & quantity		To be found locally		
Shock & vibration absorption		Rubber vibration absorber (for fan motor)		
Thermal & acoustic insulation		Polyurethane foam		
Control devices		Wired control: RC-EX3, RC-E5, RCH-E3 Remote control kit: RCN-KIT4-E2		
Ambient temperature control		Electronic thermostat		
Safety devices		Thermal protection for the fan motor Anti-frost protection thermostat		
Refrigerant pipings' diameter	mm (inch)	Gas side Ø15.88 (5/8") Liquid side Ø9.52 (3/8")		
Joining method		flare		
Refrigerant		R410A		
Drain pump		Built-in		
Condensate drain		Can be connected with VP25		
Piping insulation		Necessary (on both sides, Liquid & Gas)		
Accessories included		Condensate drain pipe		